

## Introduction

These instructions outline the use of your Brake Bleeder Kit, however it cannot take the place of your vehicle service manual, where you will find complete test procedures.

## Note:

**Support car on jack stands or solid wooden blocks, NEVER on the bumper jack. The jack supplied with the vehicle should be used only for changing wheels. Never crawl under car or run engine while vehicle is on a jack.**

### CAUTION: Special Lubricant

Dow Corning Molykote III  
Echlin ML-3  
Motorcraft WA-10  
Permatex 67VR

*Other lubricants may not be compatible with brake fluids*

## Vehicle Service Information:

The following is a list of publishers who have manuals containing electronic fuel injection system information. Some manuals may be available at auto parts stores, your local dealer, or your local public library. For others, you need to write for availability and prices, specifying the make, model and year of your vehicle.

### Aftermarket Vehicle Service Manuals:

**Chilton Book Company**  
Chilton Way  
Radnor, PA 19089

**Haynes Publications**  
861 Lawrence Drive  
Newbury Park, CA 91320

**Cordura Publications**  
Mitchell Manuals, Inc.  
Post Office Box 26260  
San Diego, CA 92126

**Motor's Auto Repair Manual**  
Hearst Company  
250 W. 55th Street  
New York, NY 10019

### Vehicle Service Manuals from Gen- eral Motors Corp.

**Buick**  
Tuar Company  
Post Office Box 354  
Flint, MI 48501

**Oldsmobile**  
Lansing Lithographers  
Post Office Box 23188  
Lansing, MI 48909


**Cadillac, Chevrolet,  
Pontiac**  
Helm Incorporated  
Post Office Box 07130  
Detroit, MI 48207

### Vehicle Service Manuals from Ford Motor Co.

**Ford Publication Dept.**  
Helm Incorporated  
Post Office Box 07150  
Detroit, MI 48207

### Vehicle Service Manuals from Chrysler Corp.

**Chrysler Corporation**  
Dymont Distribution Ser-  
vice  
Service Publication  
12200 Alameda Drive  
Strongsville, Ohio 44136

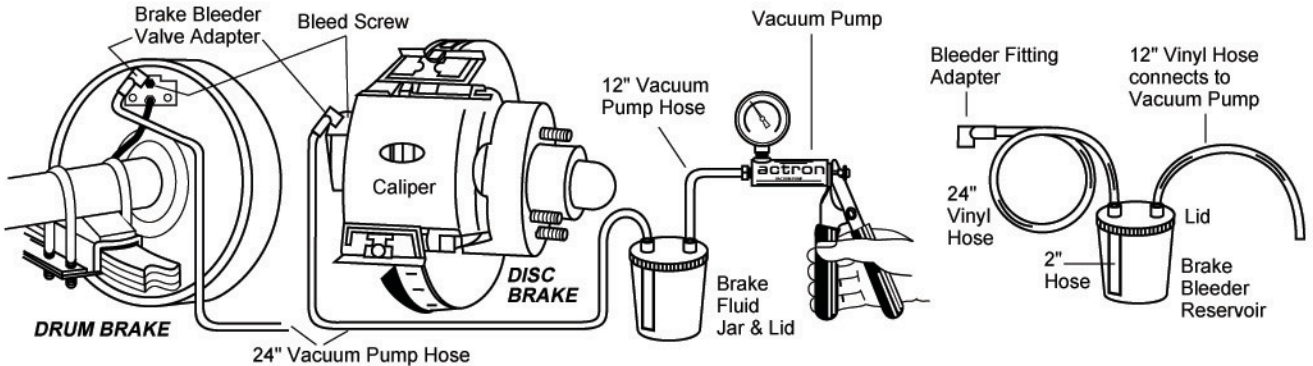

## Instructions for Use

- Brake fluid should be changed every two years or whenever brake system work is done.
- Check fluid type for your car.
- Remove bleeder valve and apply small amount of lubricant (provided) to threads, then reinstall bleeder valve.
- Attach Brake Bleeder Kit (with Actron CP7830 Vacuum Pump, if desired), lubricate jar lid, bleeder valve threads and adapter to seal out air.
- Keep new fluid topped off in master cylinder.
- Check bleeding sequence for your car; the usual sequence is right rear, left rear, right front, left front.

## One-Man Operation

- Open bleeder valve and pump Vacuum Pump.
- Bleed fluid until clear, bubble free, new fluid appears in hose (remember to keep master cylinder topped).
- Tighten bleeder valve.
- Dispose of used brake fluid properly.

## Two-Man Operation

- First person pumps up brake pedal and holds.
- Second person opens bleeder valve to bleed fluid until first person calls stop (just before pedal hits floor).
- Second person then closes the bleeder valve.
- Repeat until clear, bubble free, new fluid appears in hose (remember to keep master cylinder topped).
- Dispose of used brake fluid properly.
- Bleed master cylinder separately before mounting on the car.